TADI BROTHERS

est. 2003

Scan for
Installation video

SCAN
ME



Instruction manual for your 4CH digital system

Bench test all components before permanently mounting

NOTE: **This manual only applies to you if your screen looks like this**



NOTE: **Compare the buttons on your screen to this picture (They should be the same)**

To MUTE the sound
press and hold
the gridlines button





UNMUTE by pressing the gridlines button

TADI BROTHERS est. 2003

1(866) 966-5550 x 2

M-F 9am-5pm PST

Helpful videos to get you started

Full installation video guide for your wireless backup camera system

Video on how to mount your monitor from your ceiling

Video on how to setup your Furrion adapter kit

Video on how to mute your digital monitor

Video on connecting your Furrion cable

Video on how to improve reception and image quality

What's in the box?

What's in the box



Digital Rear View Monitor



Digital Wireless Rear View Camera

4.5-inch & 2.5-inch bracket included





Antenna Extender



2nd Dash Mount



2 X Antennas



2 Allen Wrench



Pigtails



Cigarette Adapter

TADI BROTHERS est. 2003

1(866) 966-5550 x 2

M-F 9am-5pm PST

Navigating the menu



= Changing Channels/
Hold to enter Pairing Mode



=Gridlines On/Off
Hold to Mute/Unmute



=Rotating, Flipping,
and Mirroring Image



=Increase Brightness



=Decrease Brightness



=Power On/Off



Where to start?

Stage 1 - Connecting the monitor:

1. Remove the monitor and its cables from the box
2. Connect the monitor to the U-Bracket dash mount and adjust
3. Screw the black antenna to the top of the monitor
4. Plug the Red barrel connector into the monitor socket, then connect the bare wires to your 12 or 24-volt power source; **RED** (+) and **BLACK** (-)
   TIP: if you purchased the cigarette adapter, you can use that instead

This is the **Pig Tail Cable**



Stage 2- Connecting the camera:

1. Remove the digital camera and the Pig Tail cable from the box.
   (We recommend testing the camera before permanently mounting it)
2. Screw in the black antenna to the camera
3. Plug the Pig Tail cable into the camera socket, then connect the bare wires to your 12 or 24-volt power source; **RED** (+) and **BLACK** (-)
   TIP: if you want the camera active while you're driving, connect it to a constant power source, such as a running light, otherwise use the reverse light to activate only while backing up.
4. Mount the camera in its designated location (Roof, License plate, Bumper, etc.…)


Stage 3- Pairing the camera and a 4 channel monitor:

1. Choose the channel that you want to add a camera to, by clicking on this button 
2. To enter the monitors "Pairing mode" hold down  for 5 seconds on the desired channel
3. To put the camera into "Pairing Mode" hold down the red pairing button on the camera for 10-30 seconds or until you see the camera image on the rear view monitor

Diagram of connections for a digital wireless system

Bench test all components before permanently mounting


Digital Rearview Monitor

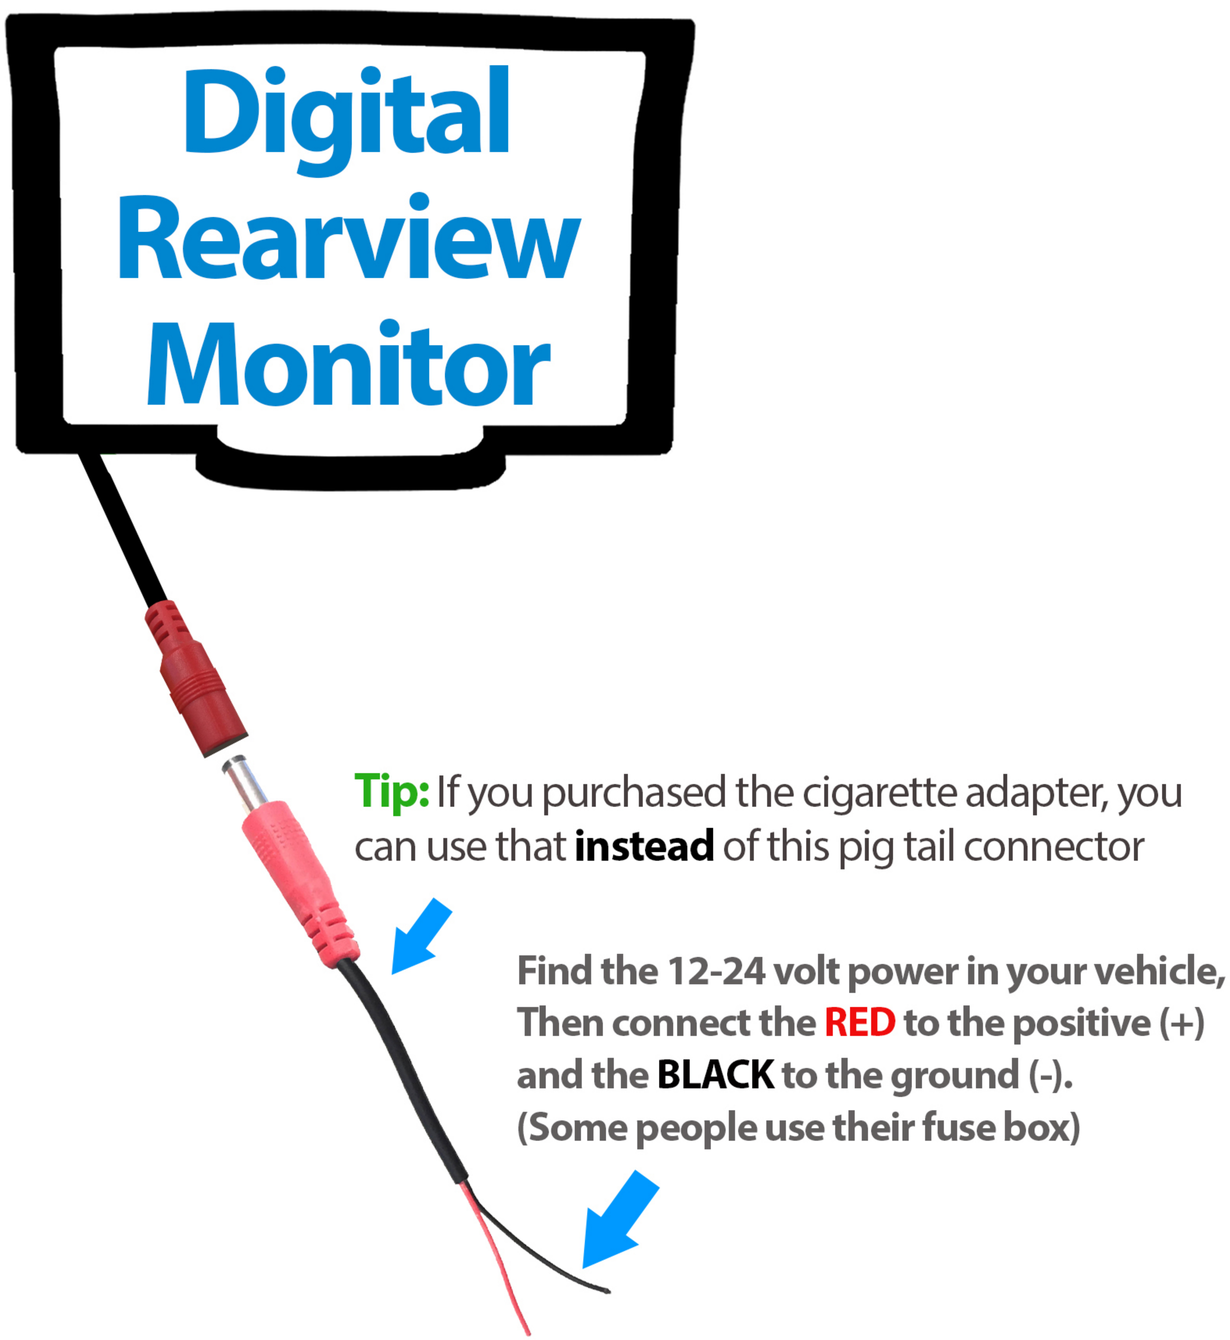

Tip: If you purchased the cigarette adapter, you can use that **instead** of this pig tail connector

Find the 12-24 volt power in your vehicle,
Then connect the RED to the positive (+)
and the BLACK to the ground (-).
(Some people use their fuse box)

Digital Camera

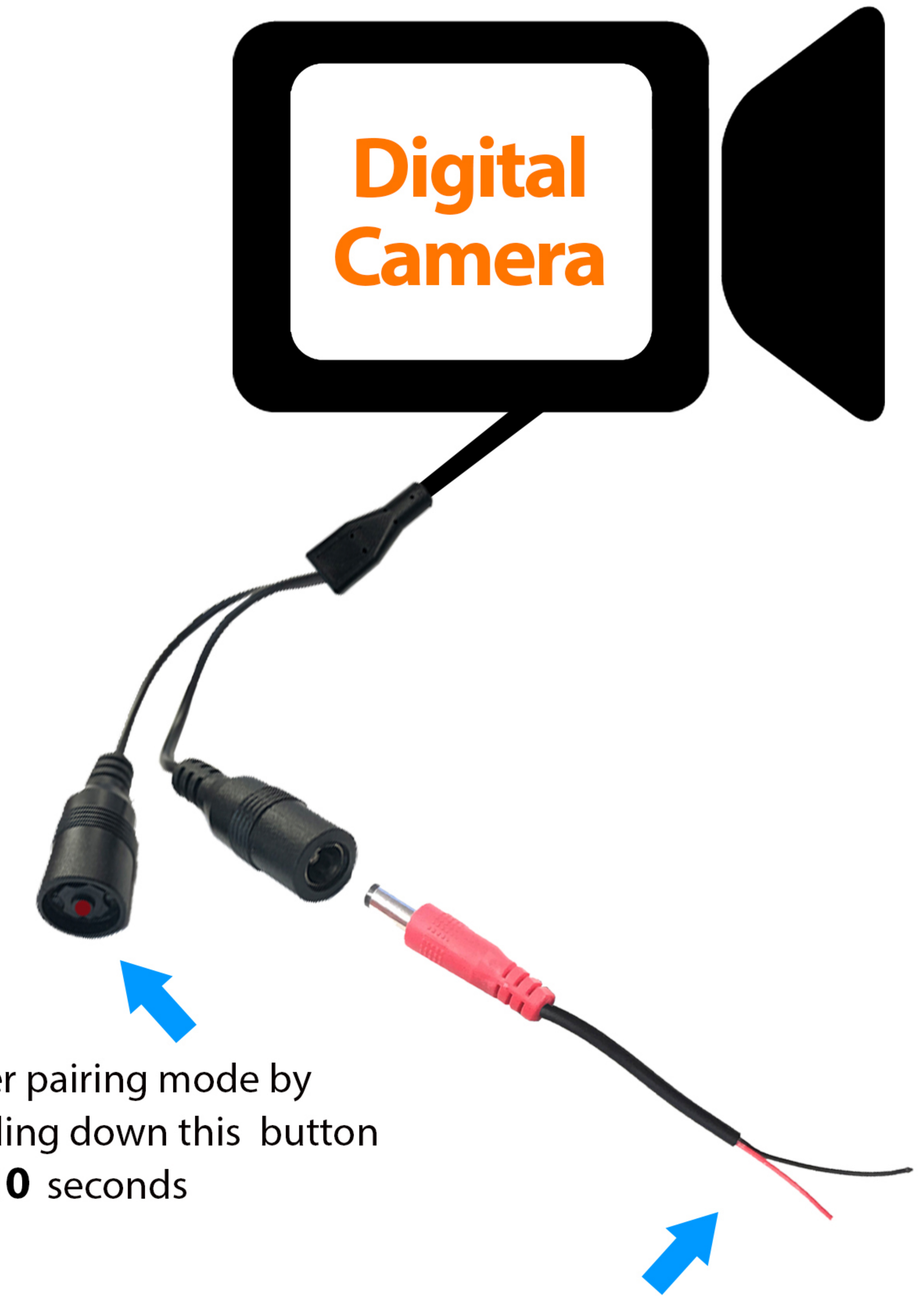


Enter pairing mode by holding down this button for **10** seconds

Connect the RED to the positive (+)
and the BLACK to the ground (-)
Such as your reverse or running light

Diagram of Trigger Wires for a digital wireless system

Bench test all components before permanently mounting

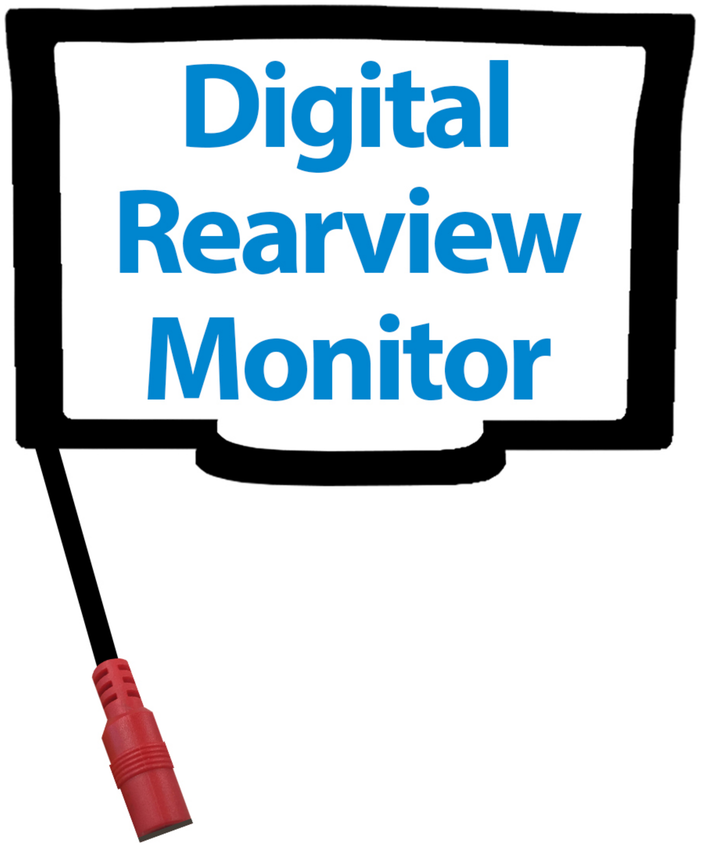


Trigger wire- As long as the screen is getting power it will automatically activate when you go in reverse once the camera gets powered



Tips that might help

To test that your camera is getting power or to see if your night vision is active, place your hand over the camera and look for the LED lights that surround the lens to turn red. This process will work with ANY of our back-up camera that have the LED lights around the lens (i.e. license camera, RV camera, Bumper camera etc.…)

NOTE: LED Lights may be very faint (they are meant to soak in light)

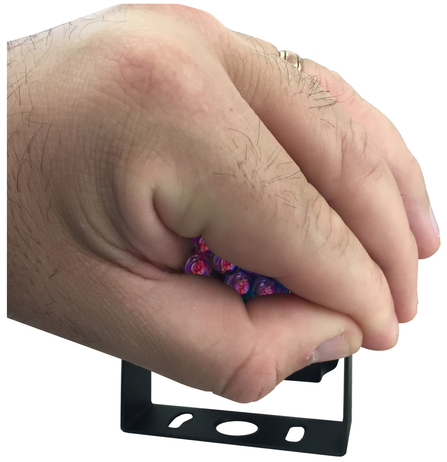



The pairing button is 100% waterproof, feel free to hide it with electric tape or let it dangle

NOTE: Do not cut the buttons wire, you might need it in the future



More Information

Warranty and Protection Plan Policy

TadiBrothers includes a **1 year standard warranty** with any purchase on all items. Some products will have longer warranties which will be stated in the details of the product. In those 30 days you can send the product for an exchange or a full refund. Any extended warranty purchased directly from TadiBrothers will the items full protection on any defects for the length of the warranty



Any extended warranties purchased from TadiBrothers will be honored by the TadiBrothers team. Return the item and it will be replaced. Items are usually returned to the customer within 5-10 business days. In some cases the customer may be liable for return shipping.

Our extended protection plans cover anything and everything that can go wrong, if the system is damaged in an accident or just dropped it will be replaced for a new item, even if it's the customers fault. In some cases an item may no longer be available as new because we have taken it out of circulation or we have a newer model and in that case we reserve the right to send a refurbished item that would include an additional warranty. In the event that we don't have a refurbished replacement for you, we will send you the newest version of that item for free.

Please note some issues may be solved via email or telephone, call or email us to solve any issues you might have at:
(866) 966-5550 or e-mail for more details help@tadibrothers.com

Thank you,
The TadiBrothers Team

Notes